








CMDB (User Rights Management)

You can assign a lot of user [rights](#) within the [IT documentation](#) of i-doit in order to achieve a fine-tuned definition of who can see and edit what. For this purpose, it is very useful to know the [structure of the IT documentation](#).

Contents

User Rights


You can reach the configuration with **Administration** **Authorization system** **Rights** **CMDB**.

 Create	 View ¹	 Edit	 Archive	 Delete	 Execute	 Administrator	Condition ²	Parameter
–	Display object in object list; Activate quick info with mouseover	Exchange object in the Exchange extension; Add Person to Person group ⁴	Archive and restore object	Mark object as deleted and restore	–	Delete object irrevocably (purge)	Object-ID	Select one, several or all objects
Create new object of a type in object list	Display object in object list; Activate quick info with mouseover	Create new object of a type	Archive and restore object type	Mark object of a type as deleted and restore	–	Delete object of a type irrevocably (purge)	Object(s) of type	Select one, several or all object types
–	Display object type configuration	Edit existing object type or create a new one	–	Delete object type irrevocably (purge)	–	without function	Object type configuration	Select one, several or all object types
–	Display object underneath the location in object list; Activate quick info with mouseover	Create new object underneath the location	–	–	–	–	Objects underneath a location	Select location
–	Display object underneath the logical location in object list; Activate quick info with mouseover	Create new object underneath the logical location	Archive and restore object underneath the logical location	Mark object beneath the logical location as deleted and restore	–	Delete object beneath the logical location irrevocably (purge)	Objects underneath a logical location	Select logical location
–	View attributes of a category	Edit existing category entry or create a new one	Archive and restore category entry	Mark category entry as deleted and restore	Use Ping and NSLOOKUP in Net category	Delete category entry irrevocably (purge)	Category	Select one, several or all categories
Create new entry in a list category (multi-valued) of a specific object type	View attributes of a category of a specific object type	Edit existing category entry of a specific object type or create a new one	Archive and restore category entry of a specific object type	Mark category entry of a specific object type as deleted and restore	Use Ping and NSLOOKUP in Net category	Delete category entry of a specific object type irrevocably (purge)	Category in object type	Select one, several or all categories of a specific object type
Create new entry in a list category (multi-valued) of a specific object	View attributes of a category of a specific object	Edit existing category entry of a specific object or create a new one	Archive and restore category entry of a specific object	Mark category entry of a specific object as deleted and restore	Use Ping and NSLOOKUP in Net category	Delete category entry of a specific object irrevocably (purge); Add Person to Person group ⁴	Category in object	Select one, several or all categories of a specific object
Create new entry in a list category (multi-valued) of an object underneath a specific location	View attributes of a category underneath a location	Edit existing category entry underneath a location or create a new one	Archive and restore category entry underneath a location	Mark category entry beneath a location as deleted and restore	Use Ping and NSLOOKUP in Net category	Delete category entry beneath a location irrevocably (purge)	Category in objects beneath a location	Select one, several or all categories beneath a location
Create new entry in a list category (multi-valued) of a self-created object	View attributes of a category of a self-created object	Edit existing category entry of a self-created object or create a new one	Archive and restore category entry of a self-created object	Mark category entry of a self-created object as deleted and restore	Use Ping and NSLOOKUP in Net category	Delete category entry of a self-created object irrevocably (purge); Add Person to Person group ⁴	Category/categories in self-created objects	Select one, several or all categories of self-created objects
–	–	–	–	–	Save changes through list editing	–	Multi edit ³	–

-	without function	-	-	-	Adapt own object lists	-	Define own object lists	-
-	without function	-	-	-	Adapt object lists of other users	-	Override the object lists of other users	-
-	without function	-	-	-	Adapt object lists for new users	-	Define object lists as default	-
-	Activate CMDB explorer for each object	-	-	-	-	-	CMDB explorer ³	-
-	Apply profiles	Edit existing profiles or create a new one	-	Delete existing profile irrevocably (purge)	-	-	CMDB explorer profile	-
-	View locations in a tree structure	-	-	-	-	-	Location view	-

Notes:

1. The View right for each condition is always ticked off and therefore the box is grayed-out.
2. Some rights may overlap. For example, if a user has read rights for all objects, he/ she doesn't need additional read rights for objects of all object types.
3. This function circumvents rights which are defined elsewhere. In order to observe all rights see *Advanced Settings* below.
4. If a person is added to a person group, this person inherits the rights of the group. To prevent that users are enabled to get additional rights, the administrator right is required for the respective category. Additionally, the Edit right for the **object ID** condition for objects of the type **Person** or **Person groups** is needed.

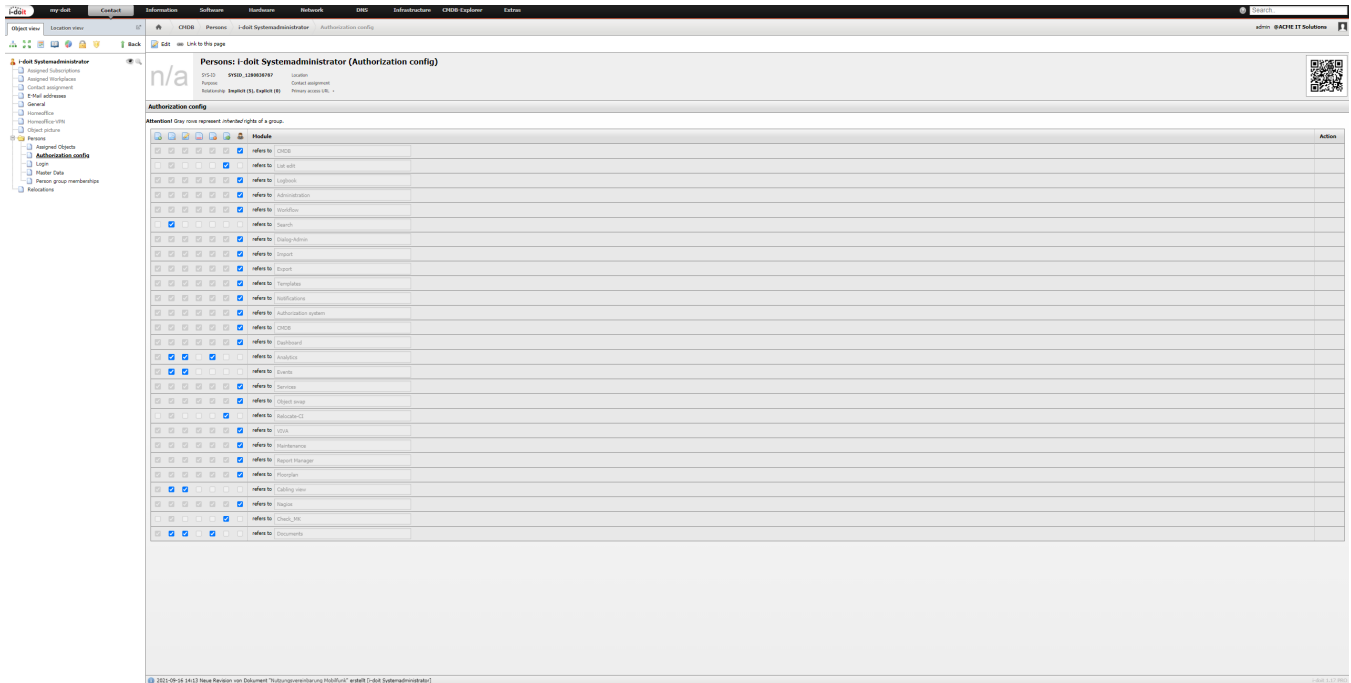

Automatic Rights for Self-created Objects

If a user has the right to create a new object and uses it, he/ she automatically inherits the right to view and edit that object. However, this right isn't indicated in the rights management and it can't be revoked.

Advanced Settings

Advanced settings are available for the CMDB module. These are not active as a standard but have to be entered under **Administration System settings Expert settings**. The respective **key** is described as follows. You can activate the setting when you define **value** with 1. Deactivate the setting with **value** 0. All described settings only affect the currently active tenant and therefore have to be set to **Tenant-wide**.

- **auth.use-in-cmdb-explorer**: The CMDB explorer takes all rights into account that were assigned elsewhere. Objects for which the user doesn't have read permission are neither displayed nor iterated. Else all objects are displayed without checking.
- **auth.use-in-cmdb-explorer-service-browser**: With the **service selection** button the CMDB explorer provides all services for which the user has read access. Else all service objects can be selected without checking.
- **auth.use-in-object-browser**: Validation of the read permission is also activated in the **object browser** (as well as its derivatives). Objects for which the user doesn't have read permission can't be selected. Already chosen objects (for example by other users) are displayed with **[Hidden]**. If this setting is inactive, all objects are shown in the object browser.

